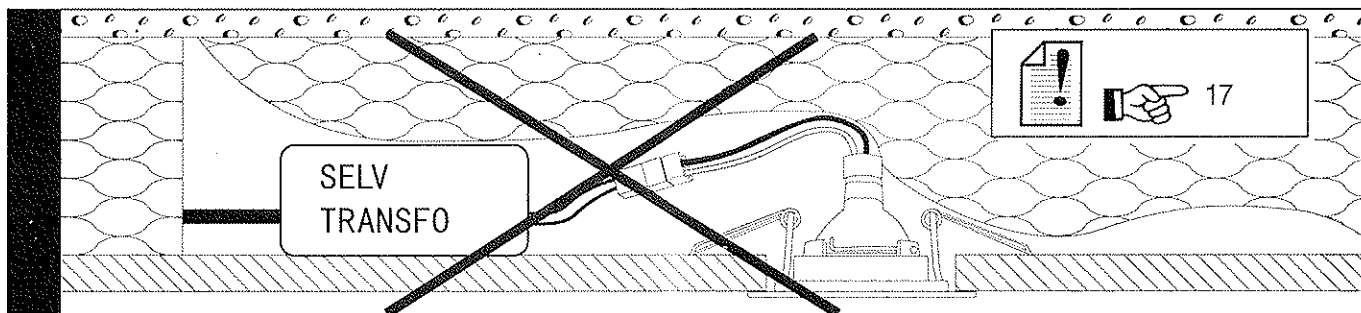
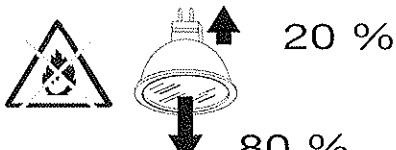


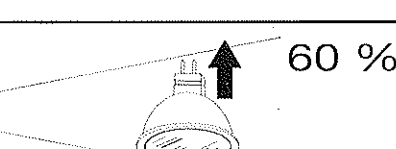
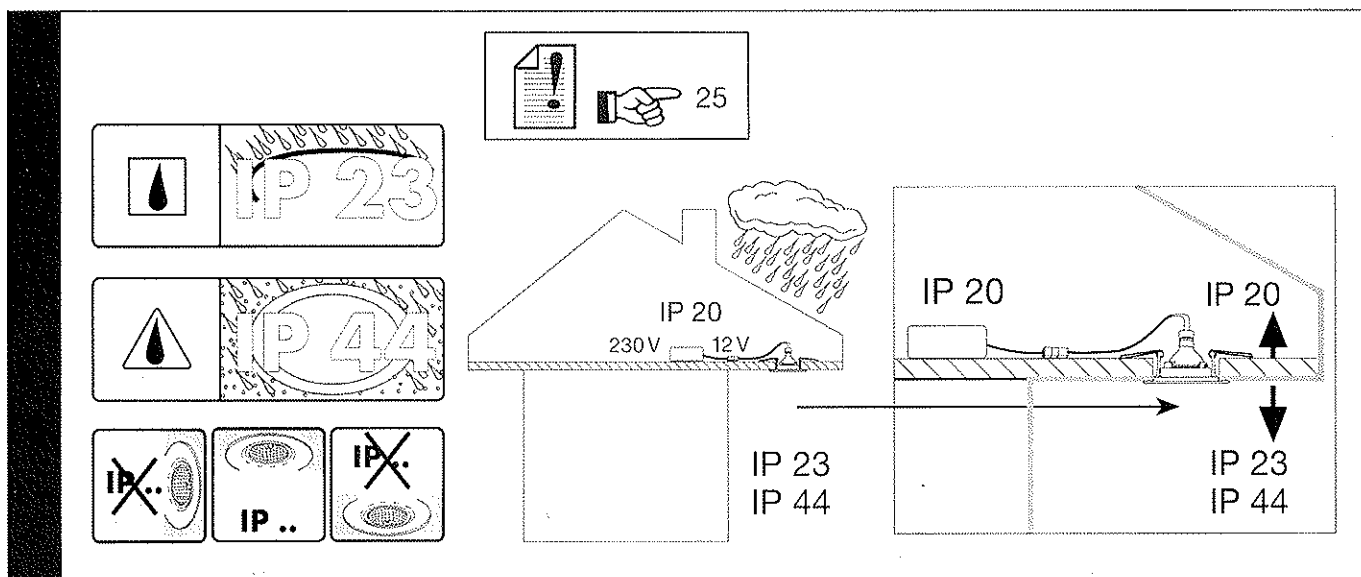




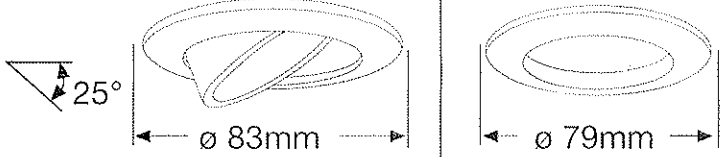

 COOL BEAM SECURITY	 1 °C	 20 % 80 %	 Art. No. 20 W 51mm GU5,3 832.21 35 W 51mm GU5,3 832.31 50 W 51mm GU5,3 832.51
 COOL BEAM	 1 °C	 60 % 40 %	








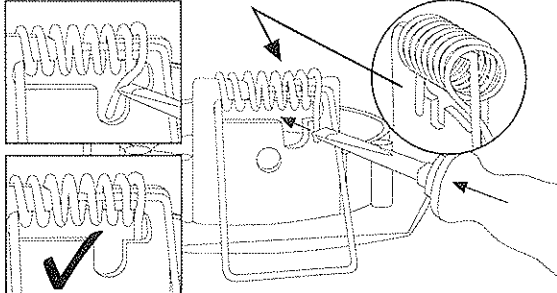

Safety Instructions

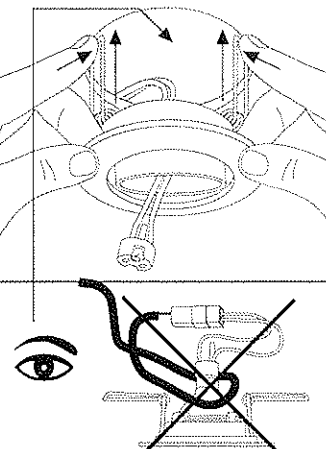
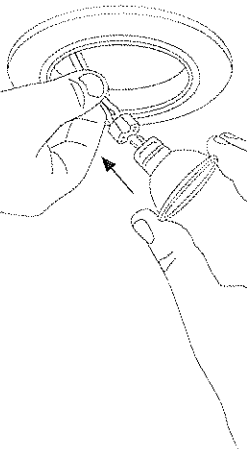
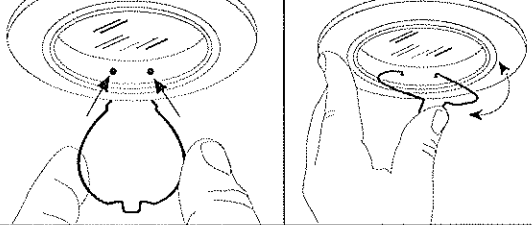
0, 1, 2, 4, 5b, 7, 8, 9, 11, 12, 15,
16, 17, 19, 20, 21, 23, 25, 29

Paulmann Licht GmbH
Quezinger Feld 2
D-31832 Springe
www.paulmann.com
☎ +49 (0) 5041 998 389
Mon. - Do. ☉ 7⁰⁰ - 20⁰⁰
Fr. ☉ 7⁰⁰ - 17⁰⁰

A  **B**  **C**

C							
							
	[mm]	[W]	[mm]	[W]	[mm]	[W]	[mm]
	68	50	60	35	60	50	90
	70	50	60	35	60	50	90

D  **E**  **F** 

G  **H**  **I**  **J** 