




Björklögstyp för marmorgatan

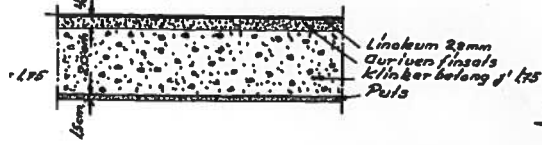


SEVARAS
26 APR 1974
21 APR 1974
24 APR 1974
with no protocol filed for reasons given.
33m LSA.

Miss Arab

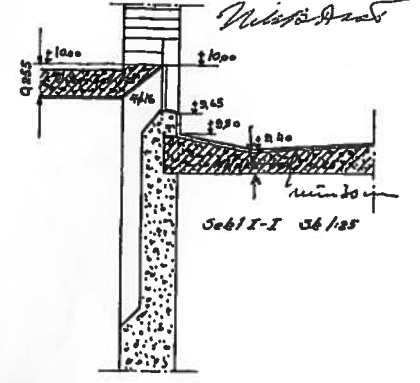

Sub I-I 36/25

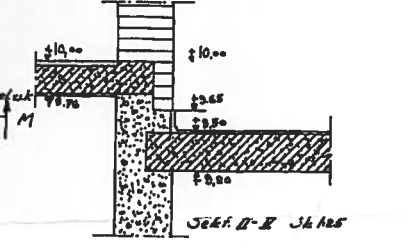

Sehr. D-E 34125

 betecknar bästa murtegel i h/lt br.
 " " " " i h/lt cementb.
 " " " " " "
 " " " " " "

<i>Ull.</i>	<i>Dm</i>	<i>Arm.</i>	<i>Buyl.</i>	<i>Def.</i>
<i>C</i>	3e plon	66 10 mm	66 mm 7/30 cm	1:3:3
<i>D</i>	" "	46 10 "	" "	1:3:3
<i>E</i>	" "	" "	" "	1:4:6
<i>F</i>	" "	" "	" "	1:4:6
<i>G</i>	" "	46 10 mm	" "	1:3:3
<i>I</i>	28+28	46 10 "	" "	1:3:3
<i>K</i>	3e plon	3e plon	" "	1:4:6
<i>L</i>	25+25/26	46 10 "	" "	1:3:3
<i>M</i>	3e plon	3e plon	" "	1:3:3
<i>N</i>	38+88	46 10 mm	" "	1:3:3
<i>O</i>	3e plon	" "	" "	1:4:6

För pelare till E, F, & O gjutas till samma längd som ovanstående murpelar och till lomsdjup enligt schema. För pelare till A & B till loms längd & lomsdjup