


Makita® Versatile 2kg Rotary Hammers



Rotary Hammers
 HR2230 22mm (7/8") HR2460/F 24mm (7/8")
 HR2470/F/T/FT 24mm (7/8") "Combination Hammers"


Satisfy Professional's Needs



Comparison of Drilling Efficiency

Note: 1. It may differ under some conditions.
 2. Numbers in the charts below are relative values when the capacities of Makita "HR2450" are indexed at 100.

Test conditions: Drilled in concrete with compressive strength of 40N/mm².

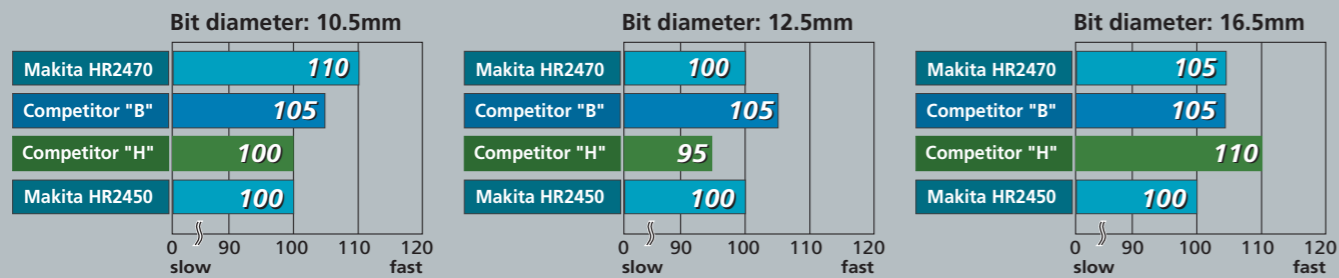


Rotary Hammer	HR2230, HR2460/F, HR2470/F/T/FT	325		
Double Insulation				
Variable Speed				
Reversing				
Torque Limiter				
Dust Collecting				
SDS-Plus Shank				
Carrying Case				
Built-in Job Light (HR2460F, HR2470F/FT only)				
Continuous rating Input	HR2230 710W	HR2460/F 780W	HR2470/F 780W	HR2470T/FT 780W
Capacity				
Concrete : (with diamond core bit)	65mm (2-9/16")	65mm (2-9/16")	65mm (2-9/16")	65mm (2-9/16")
Concrete : (with T.C.T. bit)	22mm (7/8")	24mm (15/16")	24mm (15/16")	24mm (15/16")
Steel :	13mm (1/2")	13mm (1/2")	13mm (1/2")	13mm (1/2")
Wood :	32mm (1-1/4")	32mm (1-1/4")	32mm (1-1/4")	32mm (1-1/4")
Impacts per minute	0-4,050ipm	0-4,500ipm	0-4,500ipm	0-4,500ipm
No load speed	0-1,050rpm	0-1,100rpm	0-1,100rpm	0-1,100rpm
Dimensions	357 x 84 x 214mm 14" x 3-5/16" x 8-3/8"	362 x 84 x 214mm 14-1/4" x 3-5/16" x 8-3/8"	370 x 84 x 214mm 14-1/2" x 3-5/16" x 8-3/8"	394 x 84 x 214mm 15-1/2" x 3-5/16" x 8-3/8"
Net weight	2.4kg (5.4lbs)	2.5kg (5.6lbs)	2.6kg (5.9lbs)	2.8kg (6.3lbs)
Power supply cord	4.0m (13.1ft)	4.0m (13.1ft)	4.0m (13.1ft)	4.0m (13.1ft)
Standard Equipment Quick Change Drill Chuck (HR2470T/FT only), Depth Gauge, Side Grip (Tool does not come with bit.)				

Items of standard equipment and specifications may differ by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z15211-2 2007-07

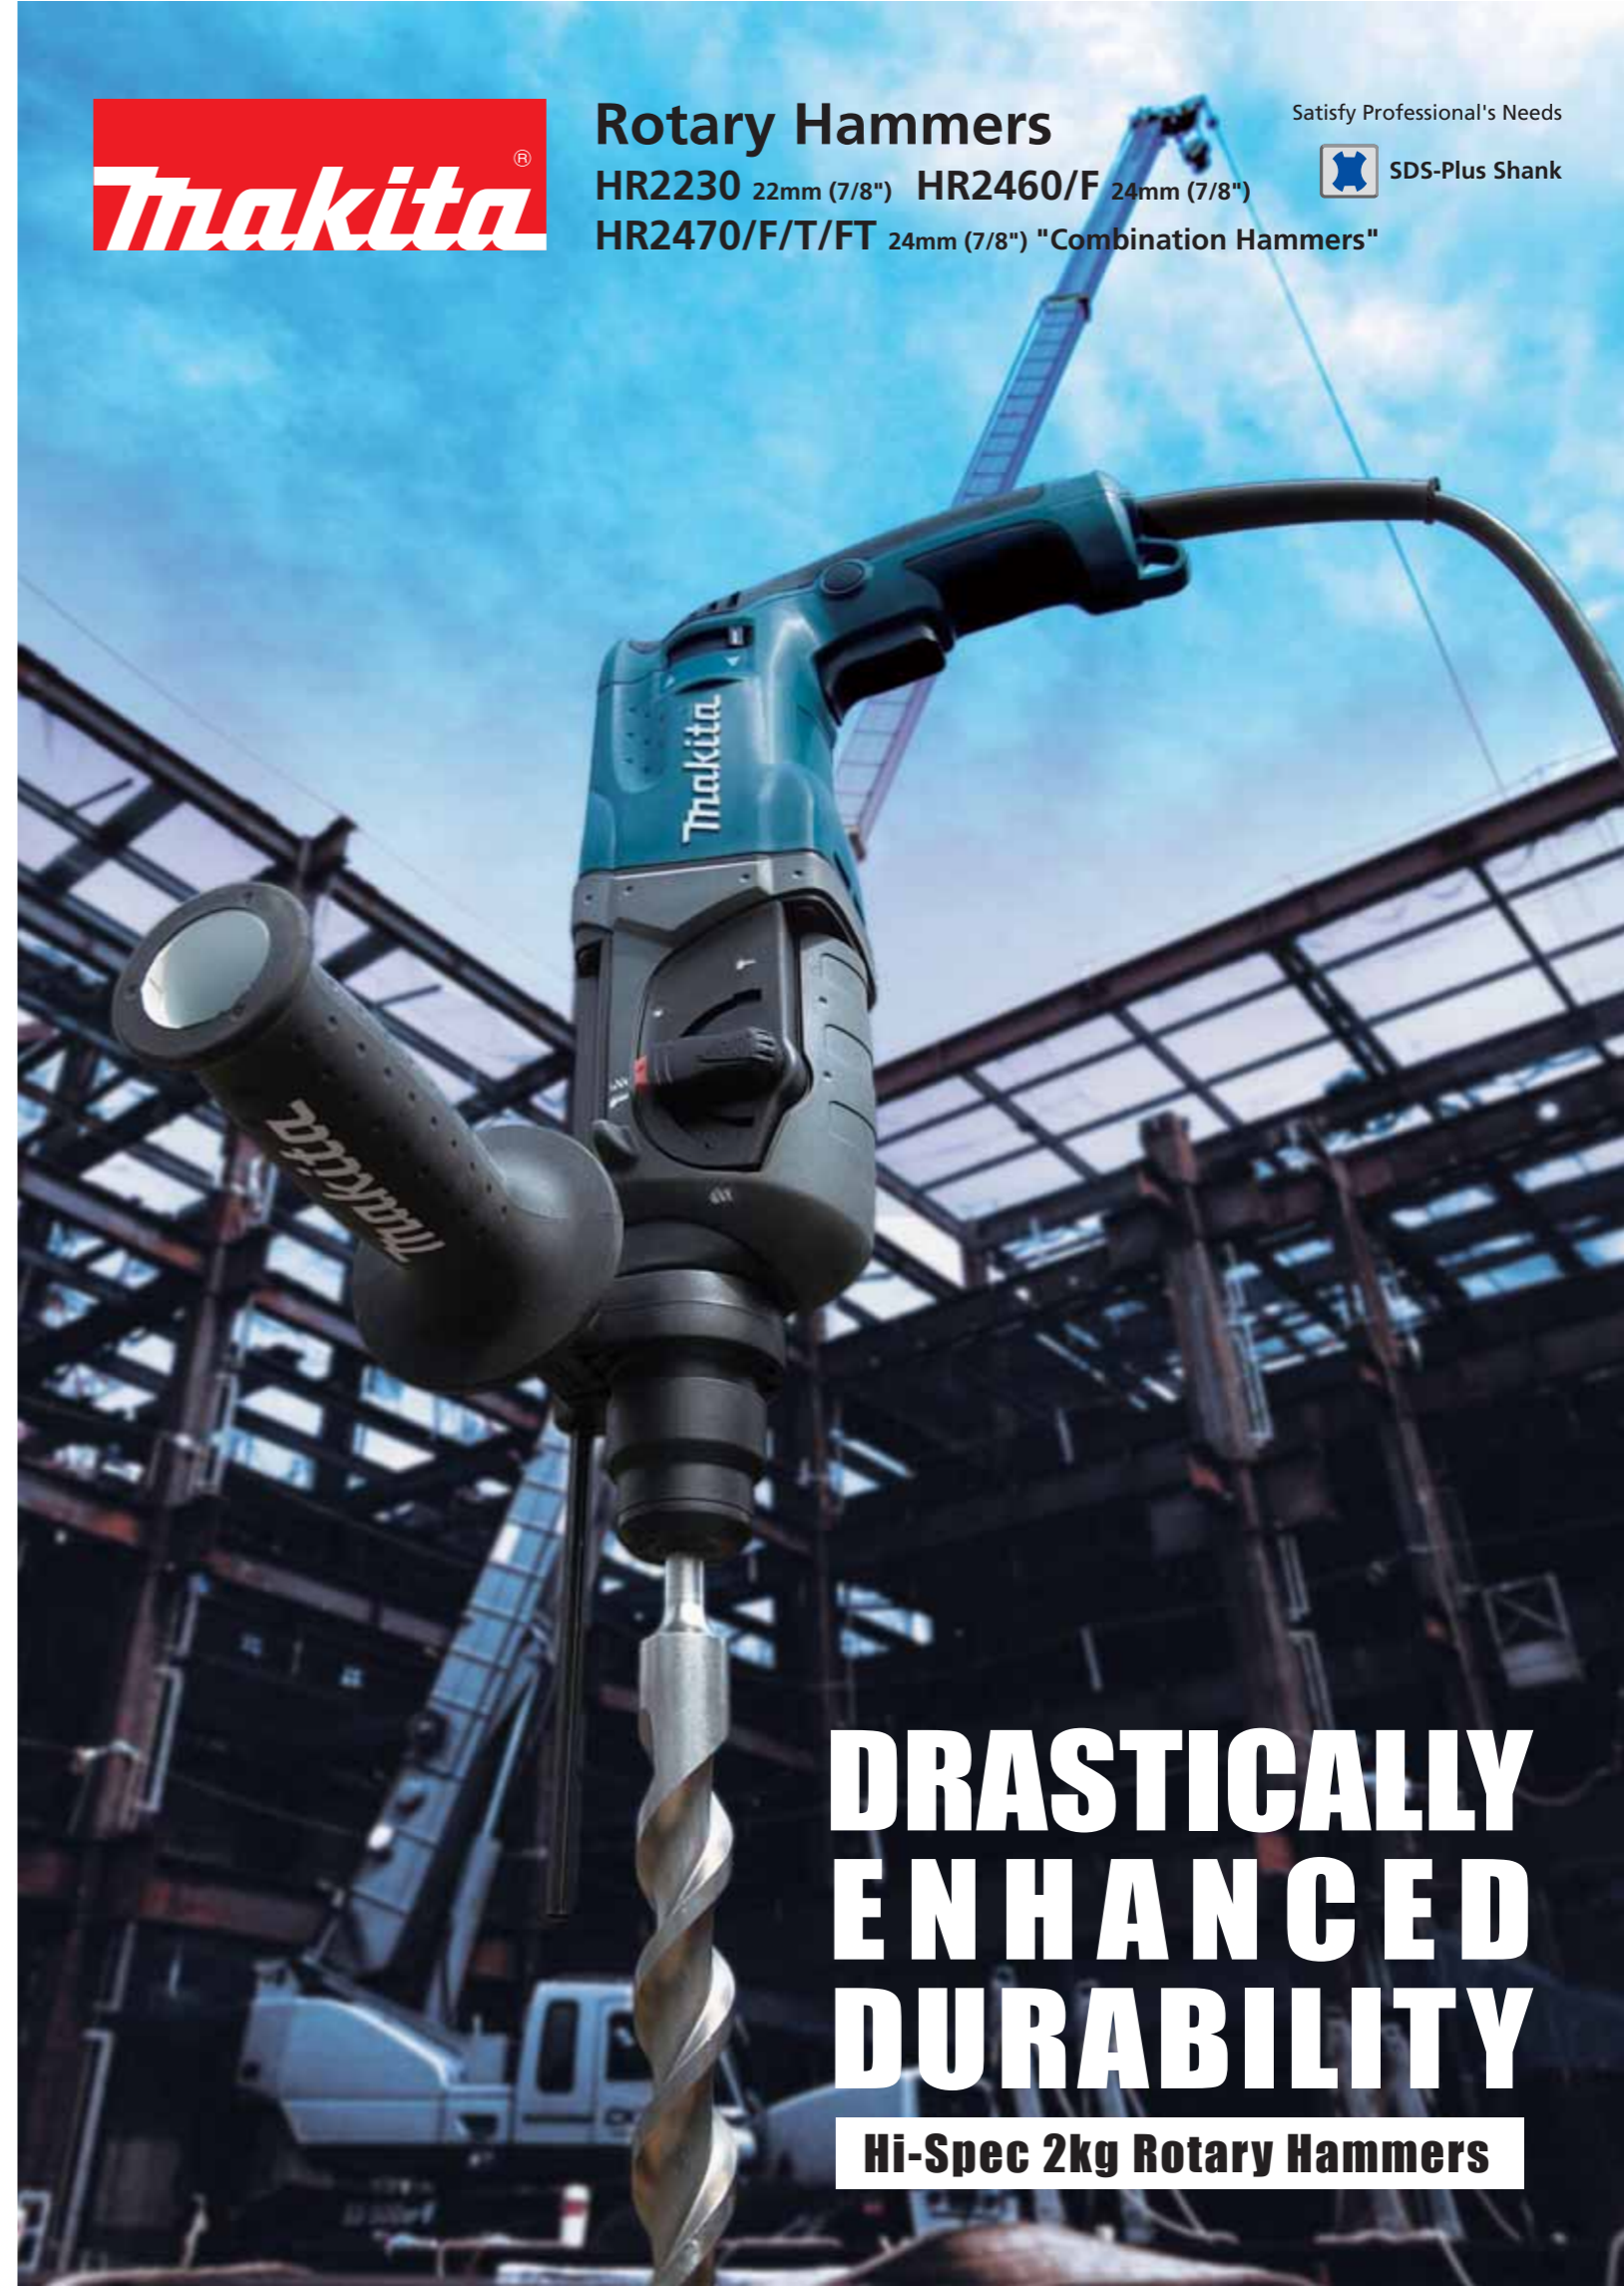

DRASTICALLY ENHANCED DURABILITY

Hi-Spec 2kg Rotary Hammers

High Durability



- Added Durability to Impact Bolt
- Large Seal Ring eliminates grease leakage from matching surface between Inner Housing and Gear Housing.
- Varnish on armature protects from dust and wire-breakage.

Photo : HR2460F


Rotation Reversing System Using Brush Holder Unit

Features the following advantages:


- Protects Carbon Brush from foreign dusts and debris.
- Life of Carbon Brush is 2.7 times long as the existing models.
- Same speed and torque even in reverse rotation
- Saves time and labor for repair thanks to simplified wiring.



One-Touch Sliding Chuck
for Easy Bit Changes



Torque Limiter
:: When drill bit hits against reinforcements, Torque Limiter operates to stop.



No Hammering when Idling
:: Ensures machine's long life.



1 Lock-On Button
for Continuous Operation
2 Variable Speed



Bumper
Protects the surface of workpiece and machine.

Rubberized Grip
Provides more control and comfort.

LED Job Light
Illuminates the working spot.
(HR2460F, HR2470F/FT only)

24mm Combination Hammers

3 MODE

HR2470/ F

780 W **2.6 kg**



LED Job Light
(HR2470F only)

HR2470T/ FT

780 W **2.8 kg**



Quick Change Chuck



with Quick Change Drill Chuck

LED Job Light
(HR2470FT only)



Rotation

Hammering with Rotation

Hammering

Chisel rotates full 360 degrees with 40 different locking positions.

24mm Rotary Hammers

2 MODE

HR2460/ F

780 W **2.5 kg**



LED Job Light
(HR2460F only)

22mm Rotary Hammer

2 MODE

HR2230

710 W **2.4 kg**



Tool does not come with bit.